

Type _____
 Catalog No. _____

GeoMatrixx™ Series

GXMA Series Medium Architectural Area Light

APPLICATIONS

- The GeoMatrixx is a perfect blend of architectural design and performance for Accent, Façade, Parking, Roadway, Security and Sign applications.

CONSTRUCTION

- Precision die-cast aluminum construction. All exposed hardware is stainless steel.
- Duraplex II dark bronze polyester powder finish is standard but the GeoMatrixx is available in a variety of designer colors.
- Injection-molded triple-finger silicone gasket.

ELECTRICAL

- Integral heat sink ensures cool operation.
- Contractor-friendly design with integral cable permitting easy, hands-free wiring.

OPTICS

- Hinged door frame with clear tempered glass lens.
- Multifaceted reflector system provides uniform distribution.
- Meets IESNA cutoff requirements in 0° position.

MOUNTING


- The GeoMatrixx can be pole mounted or ground mounted using mounting accessories.

WARRANTY/LISTINGS




- UL wet location listed for above- or below-horizontal aiming.
- Complete with a UL-Approved mounting box rated for 90°C supply wire with integral bubble level.



175 Watt Metal Halide, 0°

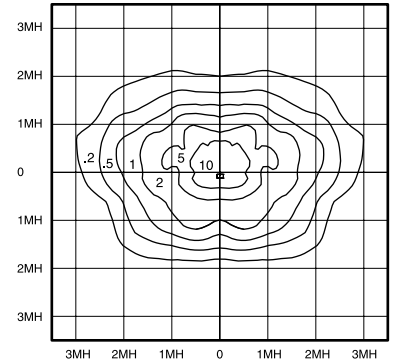

175 Watt Metal Halide, 22.5°

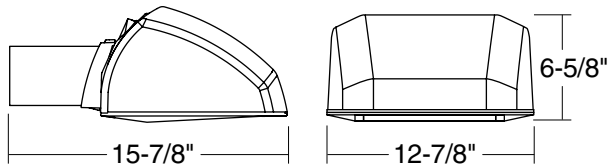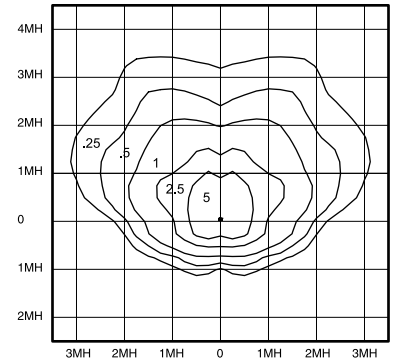

GMSARM - Arm Mount for Small and Medium Fixtures

ACCESSORIES

GMMSHIELD - Vandal Guard for Medium Fixtures

Ordering Guide Example: GXMA100PMALBLK-8

GX	M	A	100	PMA	L	BLK	—	8
							—	

Series	Size	Type	Wattage	Lamp Source	Option	Color	Voltage
GX	M=Medium	A=Area	57=57w HFL 70=70w LX 100=100w LX 150=150w LX 70=70w PMA 100=100w PMA 150=150w PMA 175=175w MA	HFL=Compact Fluorescent LX=High Pressure Sodium (HX-HPF) PMA= Pulse Start Metal Halide MA= Metal Halide	L=Lamp Included	BLK=Textured Black WHW=Textured White SL=Slate GA=Galvanite TM=Dark Titanium CL=Clay LS=Limestone BRW=Textured Bronze (BLANK)=Flat Bronze	5=480 8=120-277



Product information is subject to change without notice

